


**WALL & CEILING**

**AC/26/SB/FD**

An acoustic access panel suitable for use in any fire rated wall/ceiling system within a building that requires some form of **sound/noise containment**

**FIRE RATING**

**60 mins**
**AIR TIGHT**

**not rated**
**ACOUSTIC**

**26dB**
**LOCK OPTIONS**

 Budget  
Lock

 Suited  
Keylock

 Tamper  
Keylock

 5mm Bit  
Insert

 Ball  
Catch

 Touch  
Catch

 Dzus  
Catch


 Slotted  
Lock

 Euro  
Profile

 3 Way  
Lock

 IP65  
Insert

Some locks have size restrictions. Please contact our technical department for more information

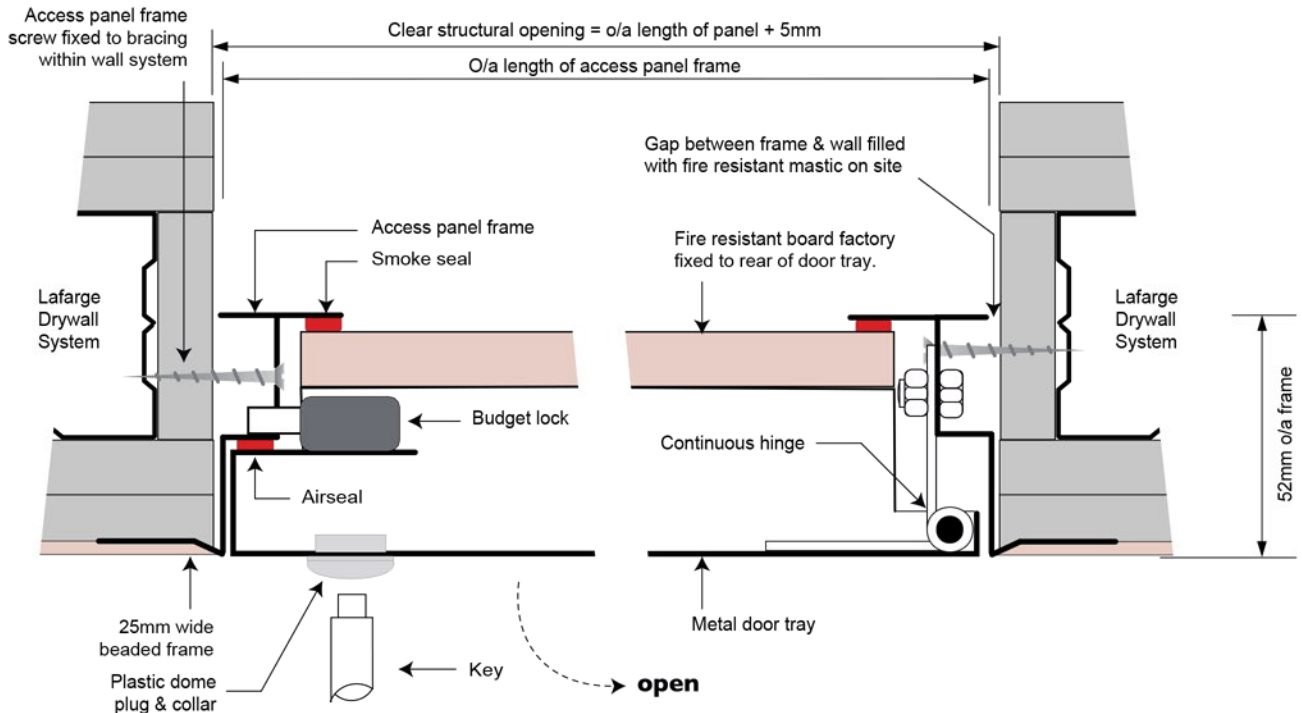
**Description**

Designed to fit into the structural membrane of jointless plasterboard wall/ceiling systems. Supplied with a beaded frame to allow for tape and jointing on site and comes complete with a fully removable flush metal door. It is inserted directly into a pre-cut hole through the face of the wall/ceiling prior to wet finishes being applied. This is a 1 Hour Fire Rated Access Panel which has been tested to B.S.476: Part 22:1987. The panel also has an acoustic rating of 26dB.

**Construction**

Constructed from 1.2mm and 1mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The panels are also available in Stainless Steel for use in corrosive areas (quote using product code and ref SS).

The removable flush metal door is fitted with a continuous metal hinge, and is secured using a standard budget lock.

**Dimensions**

Standard stock sizes are available as shown below. Non-standard sizes can be manufactured to order within maximum and minimum dimensional constraints. For further information please contact our Technical Sales Department. Sizes shown are overall dimension to inside edge of frame:

300 x 300mm
450 x 450mm
600 x 600mm
900 x 600mm (hinged on long side)
1200 x 600mm (hinged on long side)

**Fitting**

The access panel should be screw fixed

through the side of the panel frame, and will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system. When installing the access panel, the actual size of structural opening in the wall/ceiling needs to be +5mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 605 x 605mm.


**For Further Information:**

Tel: +44 (0)24 7635 2771

Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com