


XL/PF/FD/060

FOR
CEILING
AND
WALL

Designed to fit into any type of wall or ceiling system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

Lock Type					Rated	Non Rated	Non Rated
	Budget	Suited	Tamper	5mm Bit	Fire Rating	Airtight	Acoustic

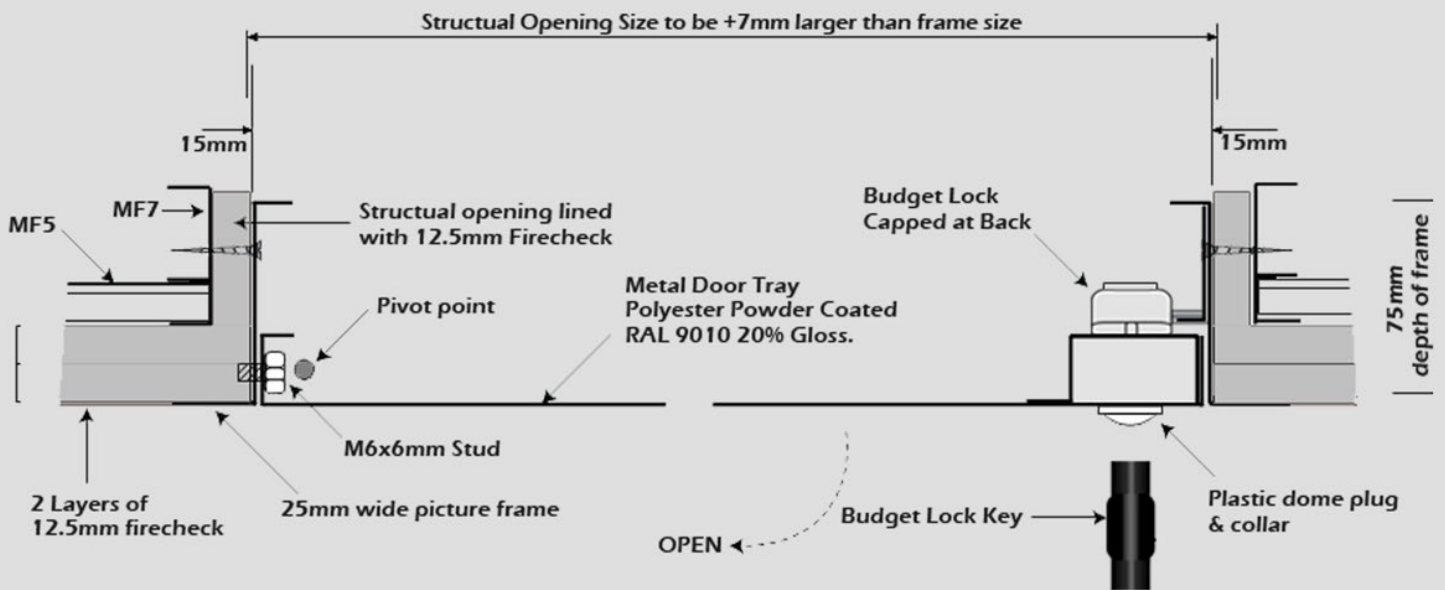

Description

A picture frame surround is provided, which enables the panel to be inserted directly into a pre-cut hole, and is screw fixed into position through the side of the panel frame. This is a 60 minute fire rated access panel which has been tested to B.S. 476 : Part 22:1987.

Construction

Constructed from 1.2mm and 1mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The panels are also available in Stainless Steel for use in corrosive areas (quote using product code and ref SS). The removable flush metal door is fitted with pin hinges, and is secured using a standard budget lock.

Dimensions

Sizes available upon request.

Fitting

The access panel should be screw fixed through the side of the panel frame, and will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system. When installing the access panel, the actual size of structural opening in the wall/ceiling needs to be +7mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 607 x 607mm.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

