


# XL/SB

FOR  
CEILING  
AND  
WALL

Designed to fit into any type of wall or ceiling system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

<b>Lock Type</b>					Non Rated Fire Rating	Non Rated Airtight	Non Rated Acoustic
	Budget	Suited	Tamper	5mm Bit			

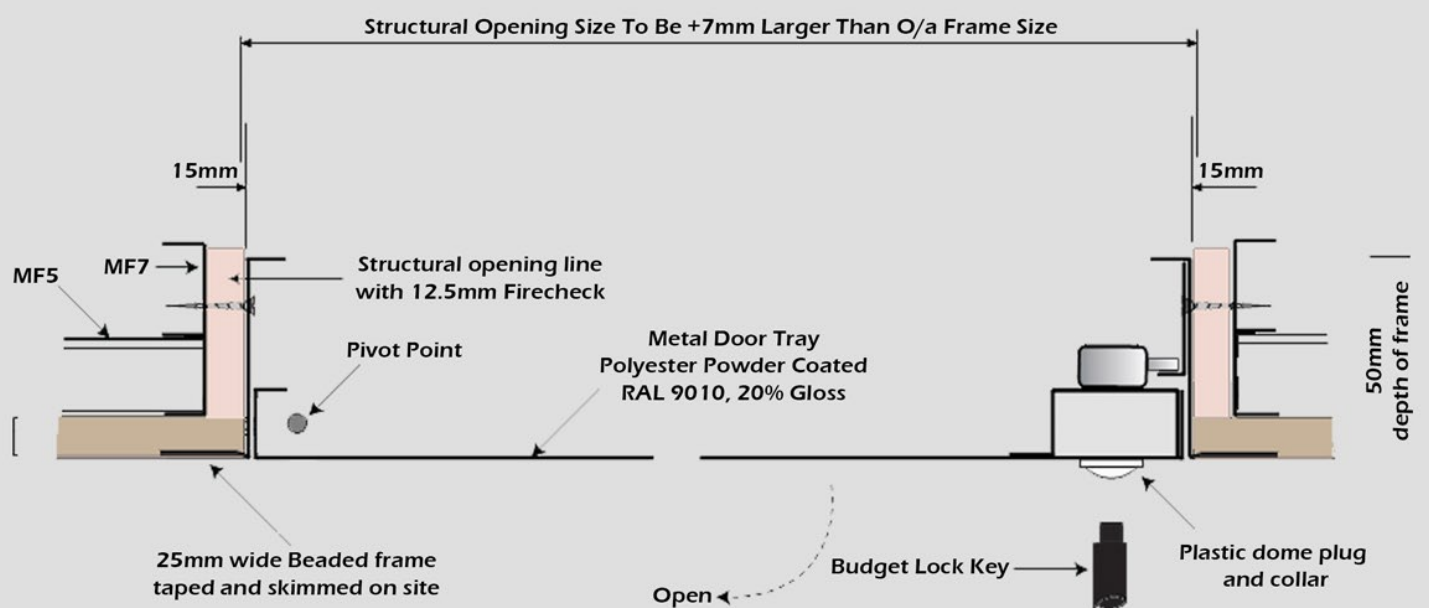

## Description

Designed to fit into the structural membrane of jointless plasterboard wall systems. Supplied with a beaded frame to allow for tape and jointing on site and comes complete with a fully removable flush metal door. It is inserted directly into a pre-cut hole through the face of the wall prior to wet finishes being applied.

## Construction

The Excel range are constructed from 1mm thick Zintec Steel, and comprise of a fixing frame and a fully demountable door. All surfaces are fully protected with a polyester powder coating of white Ral 9010 20% gloss (other colours available upon request). The door is fitted with a pin hinge, and is secured using a standard budget lock.

## Dimensions

Sizes available upon request.

## Fitting

The access panel should be screw fixed through the side of the panel frame, and will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system. When installing the access panel, the actual size of structural opening in the wall/ceiling needs to be +7mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 607 x 607mm.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

