

XP/SB

Designed to fit into any type of wall or ceiling system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.




















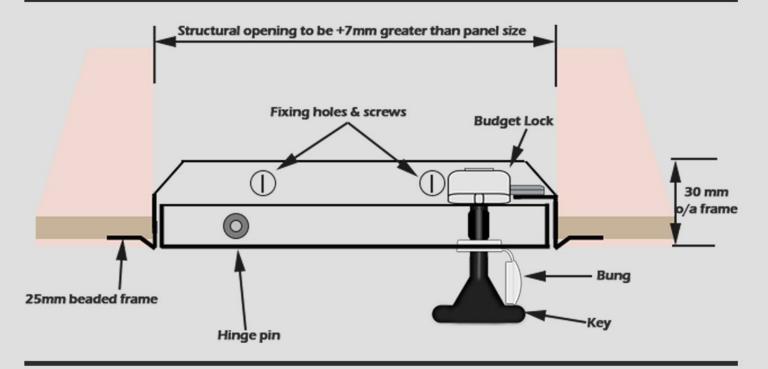

Description

A beaded frame surround is provided, which enables the panel to be inserted directly into a pre-cut hole, and is screw fixed into position through the side of the panel frame.

Construction

Constructed from 1mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The fully removable door is fitted with a simple pin hinge and is secured with a slotted chrome lock, which can be operated with a screwdriver.

Dimensions

The express range is only available up to 600x600mm.

Fitting

The access panel should be screw fixed into position through the side of the frame, into suitable bracing within the wall/ ceiling system. In certain circumstances the smaller panels (up to 300 x 300mm) may be glue fixed into position using a suitable adhesive.



Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761 E-mail: sales@exitile.com