


EG

FOR
CEILING
AND
WALL

Designed to fit into a Lay-in/ Exposed Grid type suspended ceiling system Various types are available, depending upon the type of grid and tile used.

Lock Type					Non Rated Fire Rating	Non Rated Airtight	Non Rated Acoustic
	Budget	Suited	Tamper	5mm Bit			

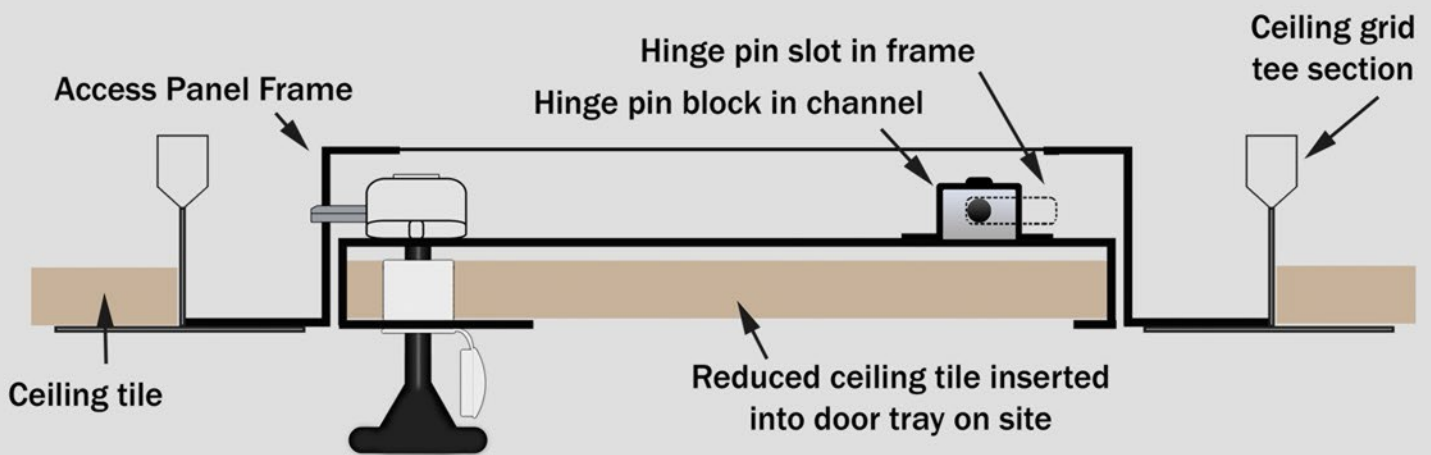

Description

The recessed door tray is fitted with a sliding pin hinge and has a removable loose edge to enable a trimmed ceiling tile to be inserted into the door tray.

Construction

Constructed from 1.2mm and 1mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The recessed door tray is fitted with a sliding pin hinge and has a removable loose edge to enable a trimmed ceiling tile to be inserted into the door tray. The access panel is secured using a standard budget lock.

Dimensions

Standard sizes are shown below. Non- standard sizes can be manufactured to order upon request, please contact our Technical Sales Department. When ordering please state the size and type of ceiling tile to be used within the ceiling system: 600 x 600mm, 1200 x 600mm, 1200 x 600mm, 1200 x 1200mm, 1200 x 1200mm.

Fitting

These panels are designed to rest inside the Tee sections of the ceiling grid. This will automatically give the correct fixing position. The frame will require independent bracing and must not be solely supported by the Tee sections. These access panels can be fitted with a Controlled Action Device (CAD) upon request. This allows the panel door to open approx. 150mm before being arrested. By pulling the door tray towards you the door can then be fully opened. For panels greater than 1200 x 600mm it is advisable to request the fitting of safety chains.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

