


# PB/SB/CIRC

FOR  
CEILING  
ONLY

Designed to fit into any type of ceiling system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

<b>Lock Type</b>					Non Rated	Non Rated	Non Rated
	Budget	Suited	Tamper	5mm Bit	Fire Rating	Airtight	Acoustic

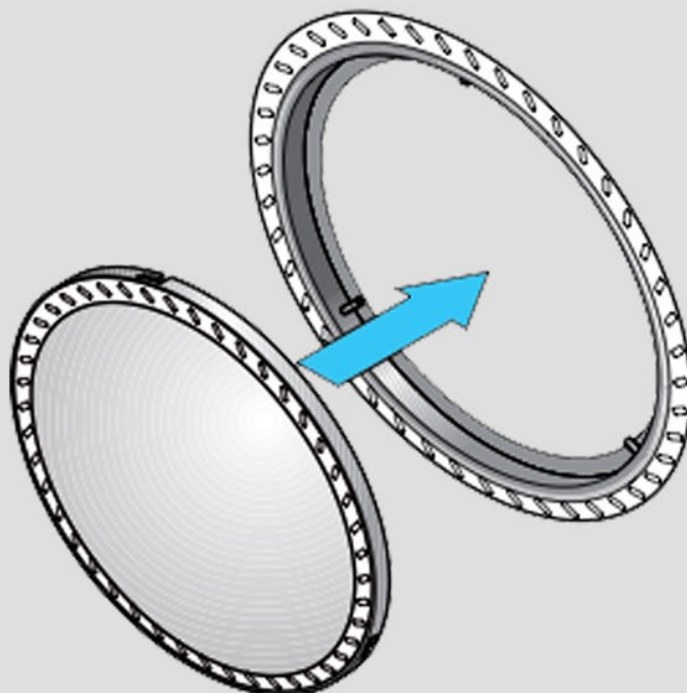

## Description

Designed to fit into the structural membrane of jointless plasterboard ceiling systems and is supplied with a beaded frame. The door tray comes pre-boarded with a beaded surround. It is inserted directly into a pre-cut hole through the face of the ceiling prior to wet finishes being applied..

## Construction

Constructed from 1.2mm thick Zintec steel which is fully powder coated in matt white Ral 9010, 20% gloss (other colours available upon request). The method of hinging and locking is dependant on the actual size and weight of the panel. For further information please contact our Technical Sales Department.

## Dimensions

Our circular panels are supplied in 300mm, 450mm and 600mm diameter sizes as standard. Non standard panel sizes available upon request. For further information please contact our Technical Sales Department.

## Fitting

When installing the access panel, the actual size of structural opening in the ceiling needs to be 5mm greater than the overall panel dimension e.g. structural opening for 600mm diameter panel will be 605mm. The access panel will require independent bracing and support, which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system. The panel is inserted directly into a pre-cut hole through the face of the ceiling membrane prior to wet finishes being applied, and screw fixed through the side of the frame into suitable bracing. (Please note that it is important that prior to applying the plaster skim coat, a joint filler and a scrim tape is applied over the junction between the beaded frame and the plasterboard in order to prevent cracking of the skim coat)

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

