


# WD/TD

FOR  
WALL  
ONLY

Designed to fit into any type of wall (or ceiling) system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

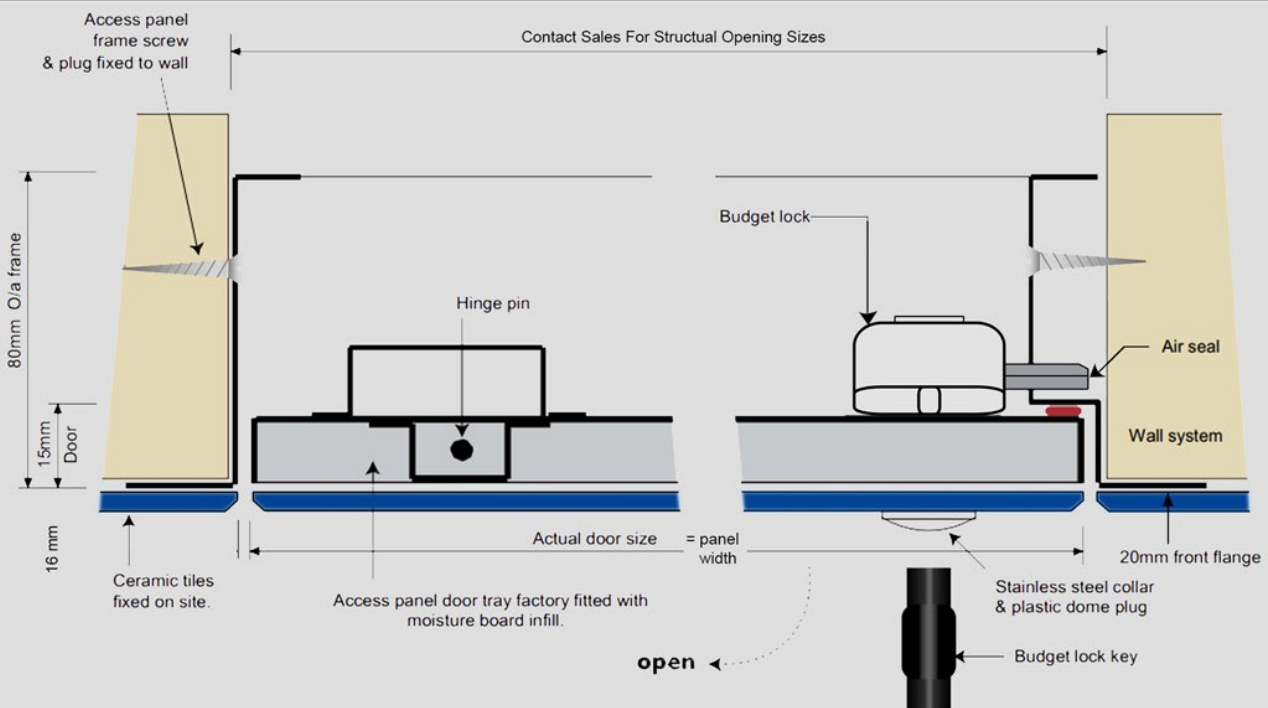

## Description

After tiling, the door frame and edges are fully concealed and the gap around the door will match the required grout width. The gap should be filled with a fire proof mastic sealant which can be cut through using a Stanley knife when the door is in use.

## Construction

Constructed from 1.5mm thick Zintec Steel; the door tray is lined with 12.5mm thick moisture board. The panel door and frame are polyester powder coated in matt white Ral 9010, 20% gloss (also available in Stainless Steel for use in areas of high humidity, quote using product code and ref SS). Supplied with a budget lock.

## Dimensions

Various sizes can be manufactured to order depending upon actual tile size and grout width required. For further information please contact our Technical Sales Department.

## Fitting

The access panel should be screw fixed through the side of the panel frame, and will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: [sales@exitile.com](mailto:sales@exitile.com)

[www.exitile.com](http://www.exitile.com)

