


# FF/MD/PF/120/BL

## SUITABLE FOR WALLS & CEILINGS

# FLIPFIX™

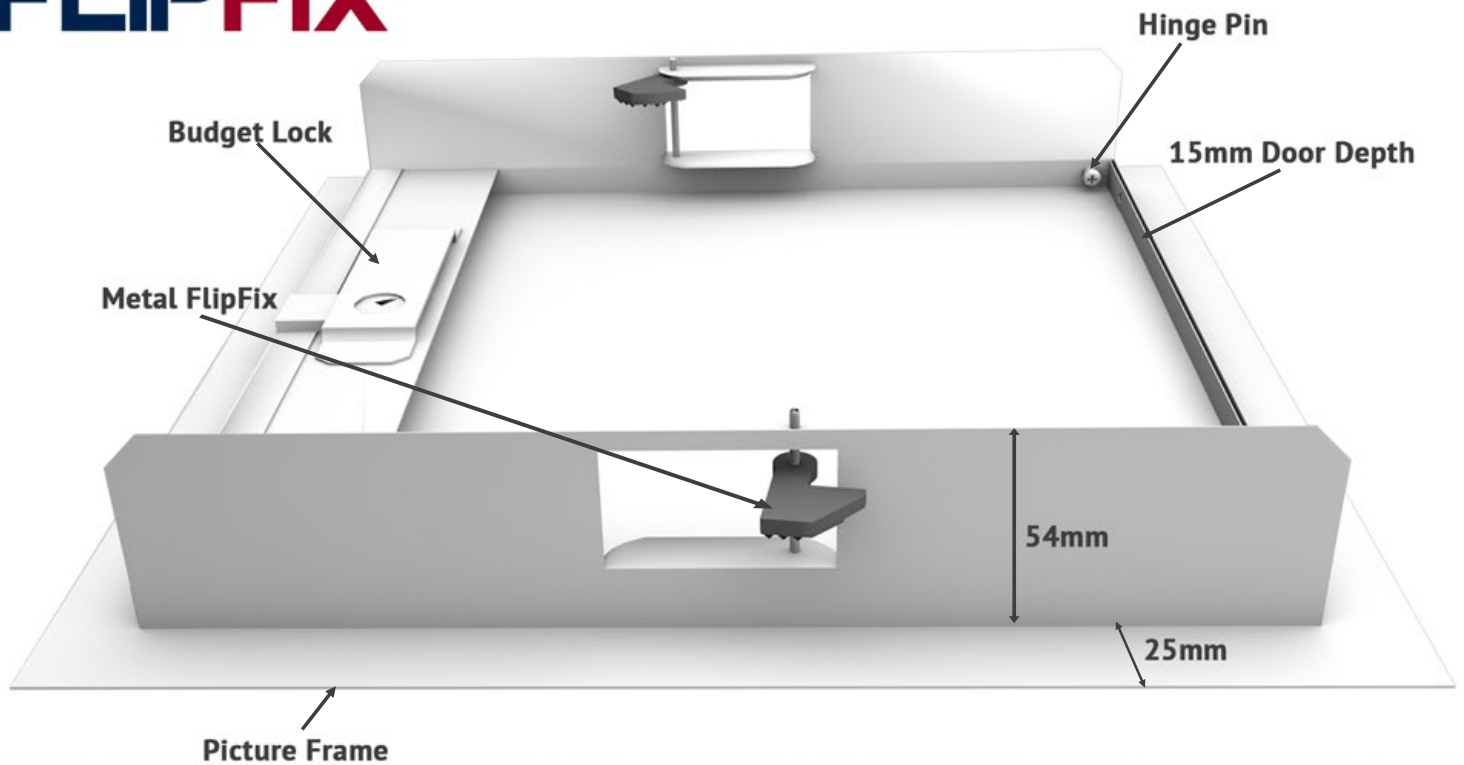

### Description

The Fire Rated FLIPFIX is designed to fit straight into a pre-cut plasterboard aperture without any bracing or glueing. It is manufactured with the unique fitting device called FlipFix, and has a 25mm picture frame and a flush metal door as well as a standard budget lock. Other locks available on request, For inspection purposes only, NOT suitable for personnel access. This panel is available upto 2 Hour fire rated in accordance with B.S. 476: Part 22:1987.

### Construction

The Fire Rated FLIPFIX Is manufactured from 0.9mm Zintec steel. It has FlipFix devices set in the top and bottom of the frame. The panel has a fully demountable metal faced door and is powder coated RAL 9010 30% Gloss. Other colours are available on request. The door is fitted with a screw pin hinge and is lockable with a standard budget lock.

### Dimensions (MM)

Stock sizes;

200x200, 300x300, 450x450, 550x550, 600x600 Bespoke sizes are available upon request.

### Fitting

To fit the panel, cut the plasterboard to the structural opening required. Allow 5mm Hinge side and 5mm width EG 600H x 600W will be 605H x 605W. Stock sizes are supplied with a pop out template built into the box for marking your structural opening. You don't need to remove the door, just open the panel using the budget key supplied, place the frame into the aperture. Using a cordless drill, tighten the FlipFix device via the fixing screw behind the door leaf to clamp on to the back of the plasterboard (the FlipFix fitting device covers 30mm to 9mm plasterboard). Lock the door and place the plastic bung into the holder, it takes seconds to fit.

# THE REVOLUTION HAS STARTED

## WORLDWIDE PATENTS PENDING